

INDUSTRIAL SHOCK ABSORBERS POWERSTOP

THREAD M27X1.5

► SERIES

PowerStop®




STANDARD ENERGY	HIGH ENERGY	ADJUSTABLE ENERGY
		
The economical	The powerful	The Adjustable

► Material	Stainless steel	► Organic oil (biodegradable)	HEES
► Permitted temperature range	-10 ... +70 [°C]	► H1-certified	Yes
► Angle of Impact max.	2 [°]	► Certifications	LABS / REACH / RoHS
► Max. force at fixed stop	17 [kN]		
► Lock nut tightening torque		► Max. absolute pressure	
- Standard energy	30 [Nm]	- Standard energy	1 [bar]
- High Energy	60 [Nm]	- High Energy	10 [bar]
- Adjustable Energy	60 [Nm]	- Adjustable Energy	10 [bar]

► TECHNICAL DATA













	Design	Series	Thread	Stroke variant	Stroke	Hardness degree	Impact velocity		Energy absorption max.			Protection	Release			Head Integrated Fix stop	Version	
									Continuous operation		Emergency stop operation		Force		Time			
					max.		min.	max.	per stroke	per hour	per stroke		min.	max.	max.			
					[mm]		[m/s]	[m/s]	[J]	[J/h]	[J]		[N]	[N]	[s]			
STANDARD ENERGY	P	SE	27X15	N	25	H - M - S - W	0,1	1,2	105	120.000	105	D - F - A	11	26	0,4	D - E - S - K	x	-A
							0,8	2,2	105	120.000	105		11	26	0,4		-	
							1,8	3,5	105	120.000	105		11	26	0,4		x	
							3,0	5,0	105	120.000	105		11	26	0,4		x	
HIGH ENERGY	P	HE	27X15	N	25	H - M - S - W	0,1	1,2	230	120.000	400	D - F - A	26	45	0,4	D - E - S - K	x	-A
							0,8	2,2	210	120.000	330		26	45	0,4		-	
							1,8	3,5	190	120.000	260		26	45	0,4		x	
							3,0	5,0	170	120.000	190		26	45	0,4		x	
ADJUSTABLE ENERGY	P	AE	27X15	N	25	H						D - F - A	26	45	0,4	D - E - S - K	x	-A
							0,1	5,0	230	120.000	230		26	45	0,4		-	
													26	45	0,4		x	
													26	45	0,4		x	
HIGH ENERGY	P	HE	27X15	L	40	H - M - S - W	0,1	1,2	230	120.000	400	D - F - A	26	45	0,6	D - E - S - K	x	-A
							0,8	2,2	210	120.000	330		26	45	0,6		-	
							1,8	3,5	190	120.000	260		26	45	0,6		x	
							3,0	5,0	170	120.000	190		26	45	0,6		x	
ADJUSTABLE ENERGY	P	AE	27X15	L	40	H						D - F - A	26	45	0,6	D - E - S - K	x	-A
							0,1	5,0	230	120.000	230		26	45	0,6		-	
													26	45	0,6		x	
													26	45	0,6		x	









► PROTECTION

no protection	Felt ring	Wiper (NBR)
D -A	F -A	A -A
		
in a clean environment	against dust, chips, ...	against liquid, oil, ...

► TECHNICAL DRAWINGS – STANDARD STROKE

N **-A**

	Short piston rod no head	Long piston rod no head	with steel head	with plastic head
	N D -A	N E -A	N S -A	N K -A
STANDARD ENERGY	 330g	 330g	 370g	 370g
HIGH ENERGY	 340g	 340g	 380g	 380g
ADJUSTABLE ENERGY	 360g	 360g	 400g	 400g

	Short piston rod no head	Long piston rod no head	with steel head	with plastic head
	L D -A	L E -A	L S -A	L K -A
HIGH ENERGY	 450g	 450g	 490g	 490g
ADJUSTABLE ENERGY	 470g	 470g	 510g	 510g

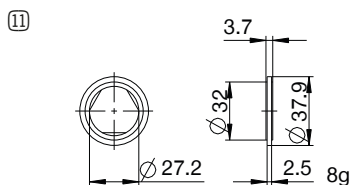
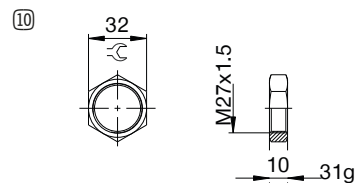
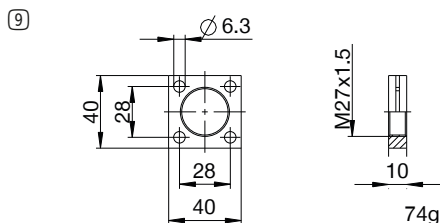
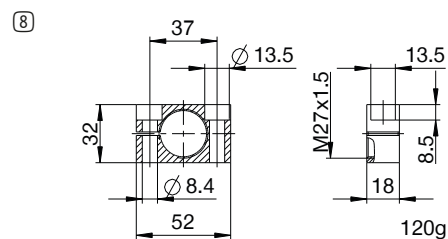
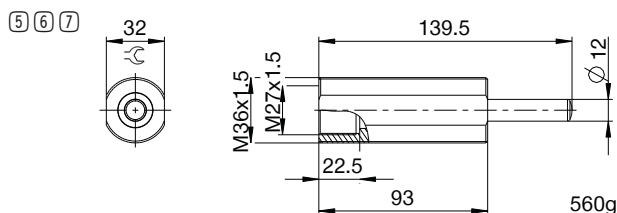
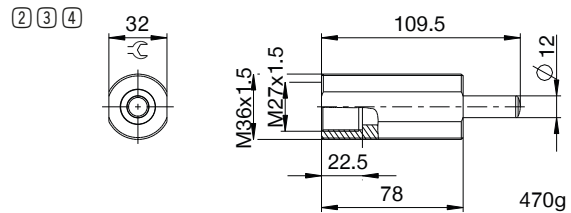
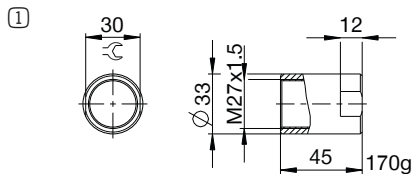


INDUSTRIAL SHOCK ABSORBERS POWERSTOP

THREAD M27X1.5

► ACCESSORIES

Pos.	Order no.	Accessories	Remarks
①	PAH27X15-A	Stop sleeve	Including 1x PVM27X15-A. Industrial shock absorber with bellow excluded.
②	PBV27X15ND-A	Side load adapter standard stroke Protection: no protection	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM36X15-A suitable for external thread of the side load adapter.
③	PBV27X15NF-A	Side load adapter standard stroke Protection: felt ring (felt)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM36X15-A suitable for external thread of the side load adapter.
④	PBV27X15NA-A	Side load adapter standard stroke Protection: wiper (NBR)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM36X15-A suitable for external thread of the side load adapter.
⑤	PBV27X15LD-A	Side load adapter long stroke Protection: no protection	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM36X15-A suitable for external thread of the side load adapter.
⑥	PBV27X15LF-A	Side load adapter long stroke Protection: felt ring (felt)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM36X15-A suitable for external thread of the side load adapter.
⑦	PBV27X15LA-A	Side load adapter long stroke Protection: wiper (NBR)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM36X15-A suitable for external thread of the side load adapter.
⑧	PKS27X15-A	Clamping flange orthogonal screwed	Tightening torque of the screws max. 22 Nm.
⑨	PKP27X15-A	Clamping flange screwed in parallel	Tightening torque of the screws max. 10 Nm.
⑩	PVM27X15-A	Stainless steel locknut	Included with the industrial shock absorber.
⑪	PDD27X15-A	Pressure chamber seal	On request. Recommended fixing with PVM27x15-A. Seal must be in full contact on both sides.



► CLASSIFICATION

P HE 27X15 L H A K -A

Design

P Industrial shock absorbers PowerStop

Series

ME Mini Energy

SE Standard Energy

HE High Energy

AE Adjustable Energy

Thread

27 Thread nominal diameter

X

15 Thread pitch (factor 10)

Stroke variant

N Standard stroke

L Long stroke

Hardness degree

H Hard (0.1 - 1.2 m/s; Adjustable Energy: 0.1 - 5 m/s)

M Medium (0.8 - 2.2 m/s)

S Soft (1.8 - 3.5 m/s)

W Supersoft (3 - 5 m/s)

Protection

D no protection

F Felt ring

A Wiper (NBR)

B Bellow (TPE)

Head

D Short piston rod no head

E Long piston rod no head

S with steel head

K with plastic head

Version

-A Versioning from a to z